



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

48V TRACK



 By INOVARA

48V TRACK

The 48V track by Collingwood offers a versatile and high-performance lighting solution. Featuring low-voltage electrified tracks designed for surface mounting, suspended, or trimless installations, the system enables the creation of bespoke lighting scenarios for any environment ensuring a perfect balance of efficiency, aesthetics, and visual comfort.

Ideal for residential, hospitality, and retail sectors, the 48V track supports dynamic, tailored configurations, transforming light into a continuously evolving design element.



CONTENTS



SPOTS PAGE 2

LED spot lights and mini spot lights specifically designed for 48V track systems. Ideal for accent lighting to highlight key interior elements. Available in multiple beam angles for tailored illumination, each projector includes a colour temperature selector to suit any lighting need.



LINEAR PAGE 8

Versatile and high-performance LED linear lighting solutions. Choose between opal diffusers for soft ambient light or UGR optics for glare control. Features include adjustable colour temperature, multiple wattage options and length and dimmability for enhanced adaptability.



PENDANTS PAGE 12

48V LED pendants combining design with functionality: from diffused opal glass spheres to focused cylindrical forms. Both versions are dimmable and equipped with a colour temperature selector, ideal for refined, precision accent lighting.



LED STRIP PAGE 14

48V LED strip with dimming and colour temperature selection. Available in lengths up to 20 metres powered by a single driver. Their flexibility, uniform light output, and IP-rated protection make them essential for both indoor and outdoor applications.



TRACK & DRIVERS PAGE 16

48V tracks provide versatile installation options, including surface mount, suspended, or trimless configurations. Available in various lengths with either low or high profiles, they offer maximum flexibility and visual consistency in any setting.



ACCESSORIES PAGE 17

A full range of accessories and drivers for the 48V system ensures maximum modularity and installation flexibility. End caps, connectors, suspension kits, and mounting components allow for fully customised configurations in any space.

SPOTS



YOKO 1 | TR45905



YOKO 2 | TR46005



YOKO 3 | TR46105



YOKO 4 | TR462905



DISU 1 | TR45205



DISU 2 | TR45305



ZUMU | TR46705



TONKA | TR46805




YOKO 1

PRODUCT CODE: TR45905



Micro LED spot light for 48V track systems, featuring a 30° beam angle and colour temperature selector (2700/3000/4000K). Power: 4W, dimmable. Interchangeable matte black cover. COB LED – Lifetime: 50,000h (L80B50).

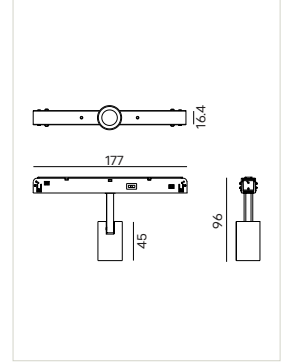

COMPATIBLE WITH:
COTR459130 - Interchangeable matt white cover for projector model TR45905




W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
4W	2700K	178	<21	IP20	>90	36°	3	5 years
	3000K	210						
	4000K	213						

YOKO 2

PRODUCT CODE: TR46005



Mini LED spot light for 48V track systems, featuring a 40° beam angle and colour temperature selector (2700/3000/4000K). Power: 7W, dimmable. Interchangeable matte black cover. COB LED – Lifetime: 50,000h (L80B50).

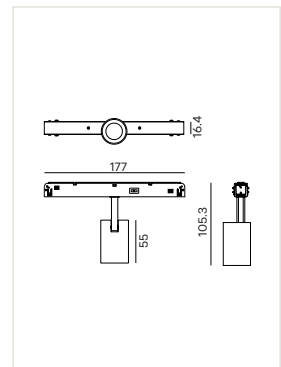

COMPATIBLE WITH:
COTR460130 - Interchangeable matt white cover for projector model TR46005



W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
7W	2700K	527	<22	IP20	>90	36°	3	5 years
	3000K	625						
	4000K	621						


YOKO 3

PRODUCT CODE: TR46105



LED spot light for 48V track systems, with a 40° beam angle and colour temperature selector (2700/3000/4000K). Power: 15W, dimmable. Interchangeable matte black cover. COB LED - Lifetime: 50,000h (L80B50).

COMPATIBLE WITH:
COTR461130 - Interchangeable matt white cover for projector model TR46105

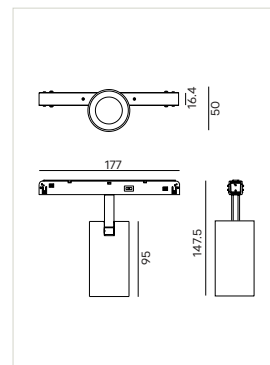

W	CCT	Lumens	UGR	IP	CRI	Beam	Classe	Warranty
15W	2700K	1116	<22	IP20	>90	36°	3	5 years
	3000K	1309						
	4000K	1314						


YOKO 4

PRODUCT CODE: TR46205



LED spot light for 48V track systems, featuring a 40° beam angle and colour temperature selector (2700/3000/4000K). Power: 27W, dimmable. Interchangeable matte black cover. COB LED - Lifetime: 50,000h (L80B50).

COMPATIBLE WITH:
COTR462130 - Interchangeable matt white cover for projector model TR46205

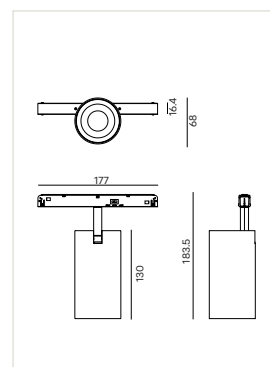

W	CCT	Lumens	UGR	IP	CRI	Beam	Classe	Warranty
27W	2700K	2391	<22	IP20	>90	36°	3	5 years
	3000K	2734						
	4000K	2675						


DISU 1

PRODUCT CODE: TR45205



Adjustable LED spot light for 48V track systems, featuring a 40° beam angle and colour temperature selector (2700/3000/4000K).
 Power: 7W, dimmable.
 Interchangeable matte black cover.
 COB LED - Lifetime: 50,000h (L80B50).

COMPATIBLE WITH:
COTR452130 - Interchangeable matt white cover for projector model TR45205

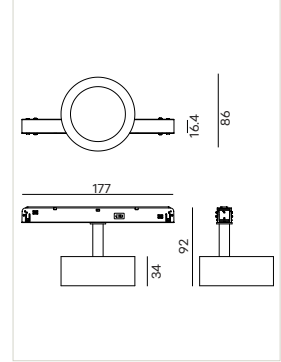

W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
7W	2700K	565	<15	IP20	>90	40°	3	5 years
	3000K	672						
	4000K	666						


DISU 2

PRODUCT CODE: TR45305



Adjustable LED spot light for 48V track systems, designed with a 36° beam angle and a built-in colour temperature selector (2700/3000/4000K).
 Power: 15W, dimmable.
 Interchangeable matte black cover.
 COB LED - Lifetime: 50,000h (L80B50).

COMPATIBLE WITH:
COTR453130 - Interchangeable matt white cover for projector model TR45305

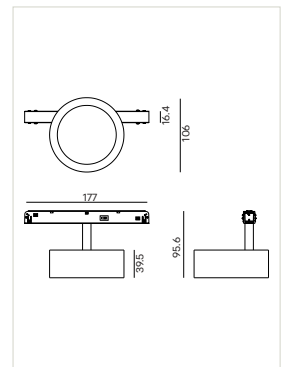


W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
15W	2700K	1357	<15	IP20	>90	30°	3	5 years
	3000K	1543						
	4000K	1594						

ZUMU

PRODUCT CODE: TR46705



Adjustable LED spot light for 48V track systems, featuring a variable beam angle from 25° to 75° and colour temperature selector (2700/3000/4000K).
Power: 15W, dimmable.
Matte black body finish.
COB LED - Lifetime: 50,000h (L80B50).




W	Beam	CCT	Lumens	UGR	IP	CRI	Class	Warranty
15W	23° (18-60°)	2700K	618	<22	IP20	>90	3	5 years
		3000K	741					
		4000K	696					
	75° (18-60°)	2700K	1277					
		3000K	1474					
		4000K	1405					

TONKA

PRODUCT CODE: TR46805



Adjustable spherical LED spotlight for 48V track, with 38° beam angle and colour temperature selector (2700/3000/4000K).
Power: 7W, dimmable.
Matte black body finish.
COB LED - Lifetime: 50,000h (L80B50).

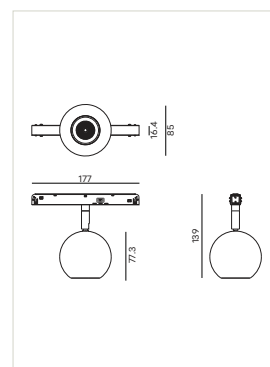

W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
7W	2700K	386	<26	IP20	>90	36°	3	5 years
	3000K	595						
	4000K	590						

LINEAR



BORU 1 | TR44705



BORU 3 | TR44905



BORU 4 | TR45005



RAITO 1 | TR44505



RAITO 2 | TR44605




BORU 1

PRODUCT CODE: TR44705



Linear LED profile for 48V track with UGR optics and colour temperature selector (2700/3000/4000K). Power: 12W, dimmable. SMD LED – Lifetime: 50,000h (L80B50).

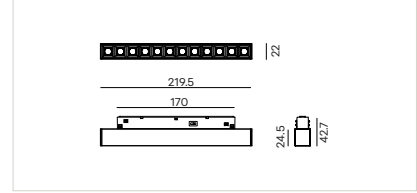


W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
11W	2700K	840	<11	IP20	>90	60°	3	5 years
	3000K	942						
	4000K	930						

BORU 3

PRODUCT CODE: TR44905



Linear LED profile for 48V track with UGR optics and colour temperature selector (2700/3000/4000K). Power: 25W, dimmable. SMD LED – Lifetime: 50,000h (L80B50).

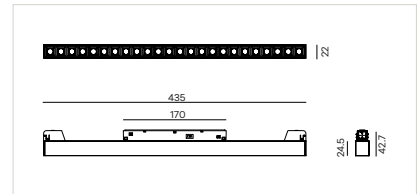


W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
26W	2700K	1748	<12	IP20	>90	60°	3	5 years
	3000K	2057						
	4000K	2020						

BORU 4

PRODUCT CODE: TR45005



Linear LED profile for 48V track with UGR optics and selectable colour temperature (2700/3000/4000K). Power: 40W, dimmable. FSMD LED – Lifetime: 50,000h (L80B50).

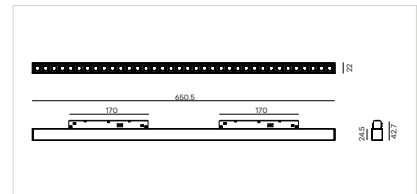


W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
39W	2700K	2575	<10	IP20	>90	60°	3	5 years
	3000K	3141						
	4000K	3103						

RAITO 1

PRODUCT CODE: TR44505



Linear LED profile for 48V track with opal diffuser and colour temperature selector (2700/3000/4000K). Power: 11W, dimmable. SMD LED – Lifetime: 50,000h (L80B50).

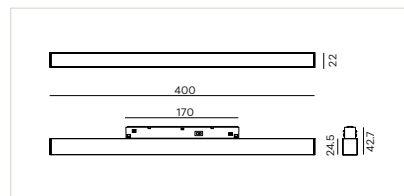


W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
11W	2700K	954	>21	IP20	>90	105°	3	5 years
	3000K	1013						
	4000K	1006						

RAITO 2

PRODUCT CODE: TR44605



Linear LED profile for 48V track with opal diffuser and colour temperature selector (2700/3000/4000K). Power: 18W, dimmable. SMD LED – Lifetime: 50,000h (L80B50).

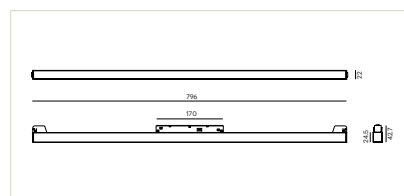

W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
18W	2700K	1647	>22	IP20	>90	105°	3	5 years
	3000K	1677						
	4000K	1784						


PENDANTS



TORU 2 | TR47005



TOMO | TR45405

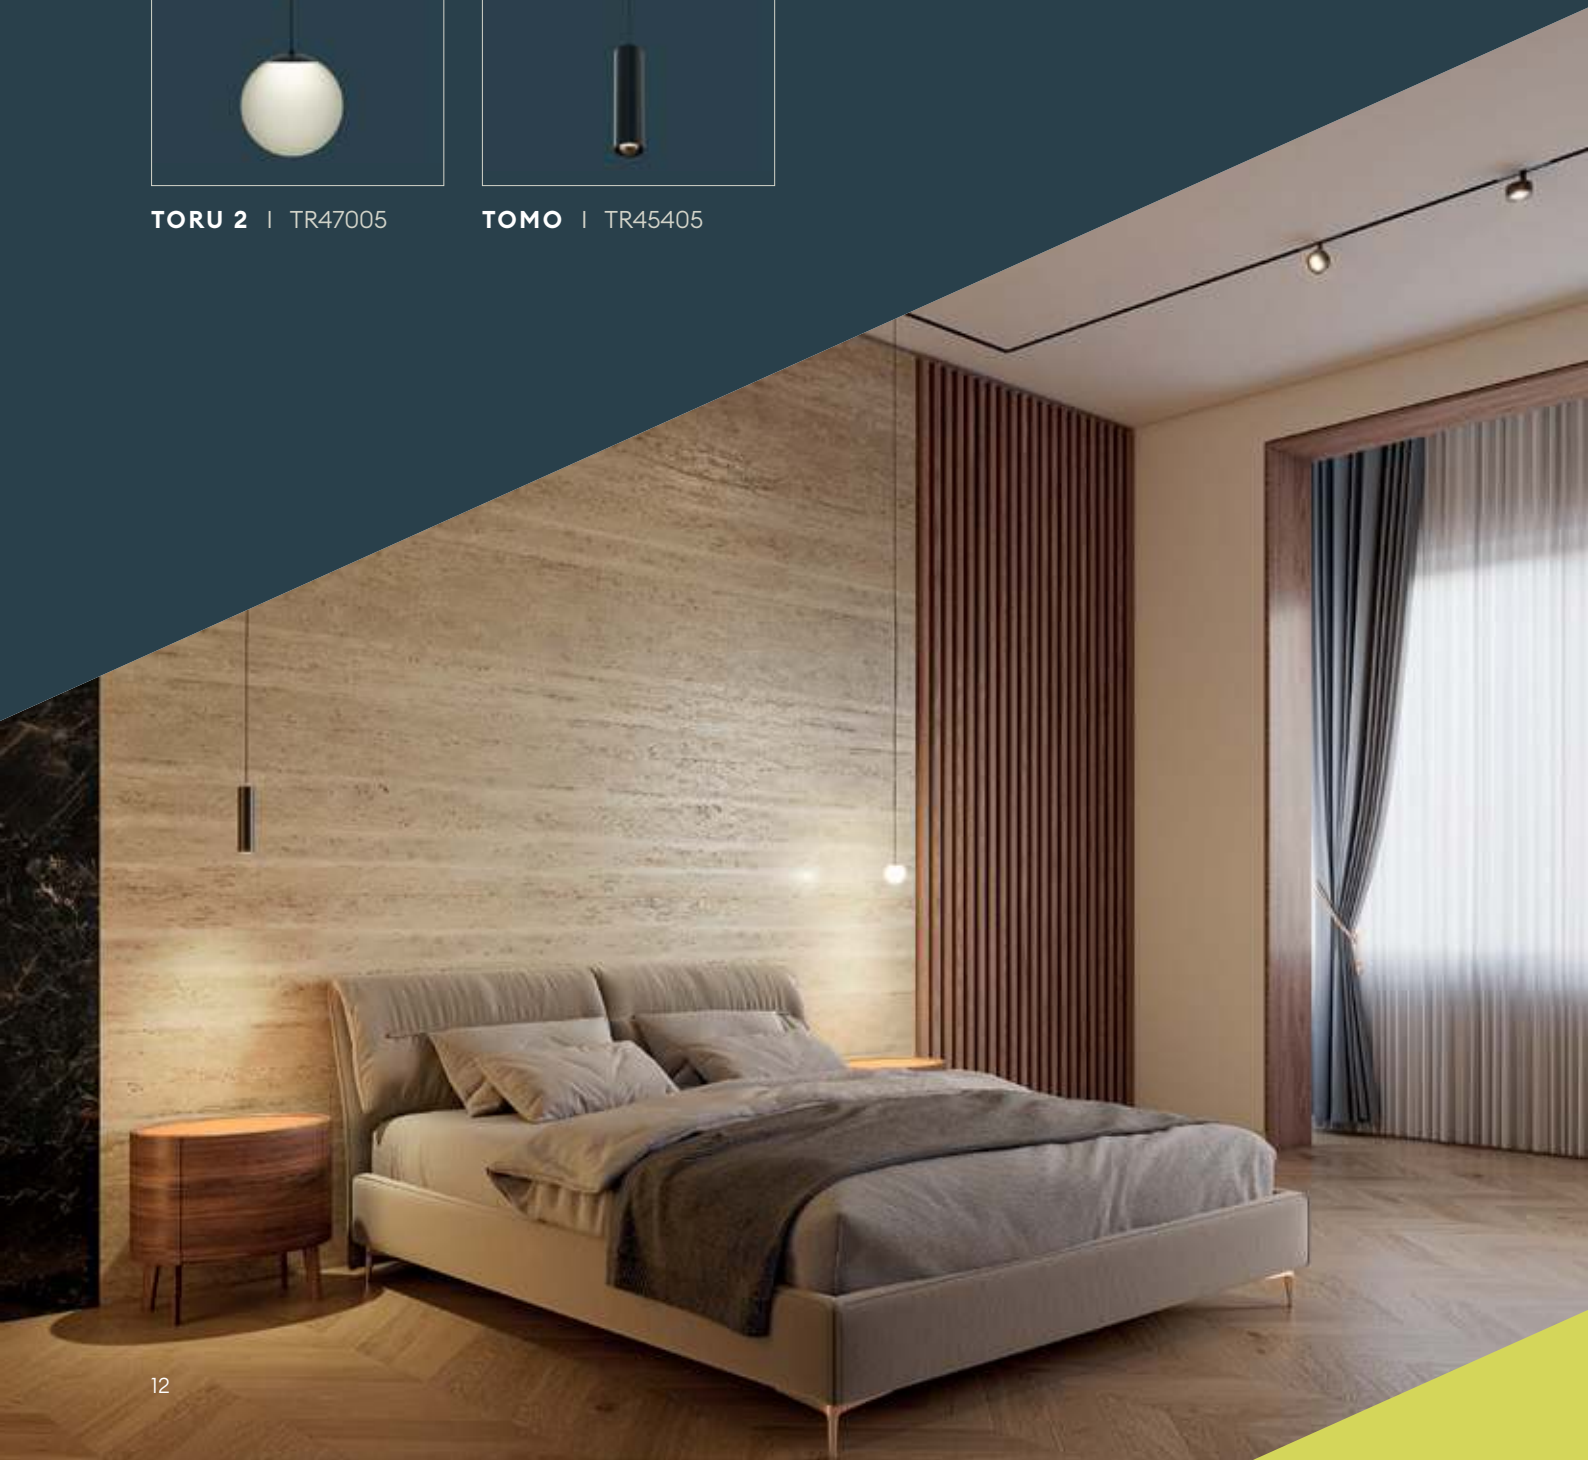


TORO 2

PRODUCT CODE: TR47005



Decorative opal glass LED globe for 48V track systems, with colour temperature selector (2700/3000/4000K).
 Power: 5W, dimmable.
 Matte black body finish.
 COB LED - Lifetime: 50,000h (L80B50).

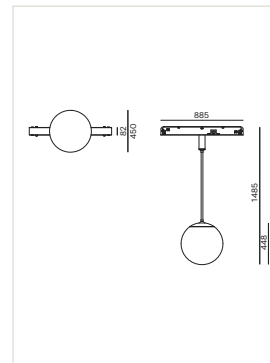


W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
5W	2700K	338	<26	IP20	>90	180°	3	5 years
	3000K	390						
	4000K	385						

TOMO

PRODUCT CODE: TR45405



Cylindrical LED pendant for 48V track, 40° beam angle, with colour temperature selector (2700/3000/4000K).
 Power: 20W, dimmable.
 Interchangeable matte black cover.
 COB LED - Lifetime: 50,000h (L80B50).

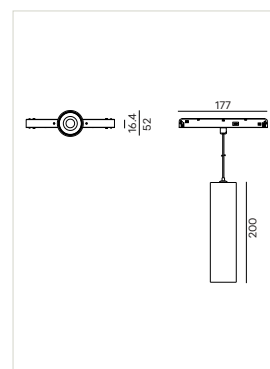

COMPATIBLE WITH:
COTR454130 - Interchangeable matte white cover for spotlight TR45405

W	CCT	Lumens	UGR	IP	CRI	Beam	Class	Warranty
19W	2700K	1260	<26	IP20	>90	40°	3	5 years
	3000K	1492						
	4000K	1492						

LED STRIP



IP20 | 48092



IP67 | 48102




48VDC (IP20)

PRODUCT CODE: 48092



Flexible LED strip with monochromatic LEDs mounted on a white PCB. Available in 10m and 20m rolls. Maximum feed length per reel: 20 metres. Designed for installation within aluminium profiles (to be ordered separately). Power supply and control gear not included.

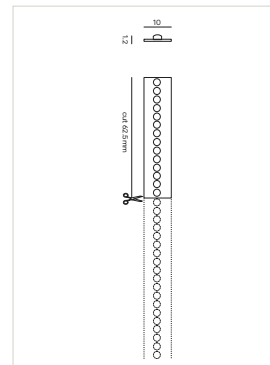


10m Product Code	20m Product Code	CCT	Lumens/m	W/m	CRI	LED/m	Cut mm	Class	Warranty
48092/2700K/10	48092/2700K/20	2700K	1994	11W	>80	224	62,5	3	5 years
48092/C/10	48092/C/20	3000K	1994	11W	>80	224	62,5	3	5 years
48092/N/10	48092/N/20	4000K	2113	11W	>80	224	62,5	3	5 years
48092/90/2700K/10	48092/90/2700K/20	2700K	1810	11W	>90	224	62,5	3	5 years
48092/90/C/10	48092/90/C/20	3000K	1810	11W	>90	224	62,5	3	5 years
48092/90/N/10	48092/90/N/20	4000K	1920	11W	>90	224	62,5	3	5 years

48VDC (IP67)

PRODUCT CODE: 48102



Flexible IP67-rated LED strip. Monochromatic LEDs mounted on a white flexible circuit board, enclosed in a transparent silicone tube with 3M double-sided adhesive backing. Available in 10m and 20m lengths. Maximum supply length per single reel: 20m. Includes IP-rated end caps and mounting clips with screws. Optional end cap kit available separately (code: **KIT/LS01/TAPPI**). Installation using clips or on aluminium profiles (to be ordered separately). Power supply and control gear not included.

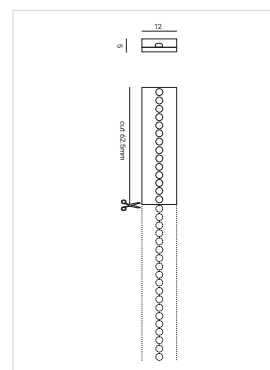

10m Product Code	20m Product Code	CCT	Lumens/m	W/m	CRI	LED/m	Cut mm	Class	Warranty
48102/2700K/10	48102/2700K/20	2700K	1994	11W	>80	224	62,5	3	5 years
48102/C/10	48102/C/20	3000K	1994	11W	>80	224	62,5	3	5 years
48102/N/10	48102/90/N/20	4000K	2113	11W	>80	224	62,5	3	5 years
48102/90/2700K/10	48102/90/2700K/20	2700K	1810	11W	>90	224	62,5	3	5 years
48102/90/C/10	48102/90/C/20	3000K	1810	11W	>90	224	62,5	3	5 years
48102/90/N/10	48102/90/N/20	4000K	1920	11W	>90	224	62,5	3	5 years

TRACK



TR47705
Length: 1m
Warranty: 2 years

TR47805
Length: 2m
Warranty: 2 years

TR47905
Length: 3m
Warranty: 2 years

48V high-profile track for surface-mounted or suspended installation.



TR47105
Length: 1m
Warranty: 2 years

TR47205
Length: 2m
Warranty: 2 years

TR47305
Length: 3m
Warranty: 2 years

48V track for surface-mounted or suspended installation.



TR47405
Length: 1m
Warranty: 2 years

TR47505
Length: 2m
Warranty: 2 years

TR47605
Length: 3m
Warranty: 2 years

48V track for trimless installation.

DRIVERS

CD1823M

100W concealed power supply for 48V track. Supplied with 3m power cable.

CD1833M

250W concealed power supply for 48V track. Supplied with 3m power cable.

5458/DALI

Dimming interface DALI/PUSH/0-10V or 1-10V. Compatible with 24-48V systems.

5960/U & 5960/U

Universal controller 24-48V with RF 2.4 GHz, Bluetooth & Wi-Fi (2.4GHz) only for 5960. Compatible with single-colour, Dim to Warm, tunable white, RGB, RGBW LED strips and 48V track. Can be paired with remote control 5941/C and wall touch panel 5942/T.

5941/C

4-zone RF remote control for use with universal controllers 5940/U and 5960/U.

5742

Power supply 48V, power 150W. IP20

5743

Power supply 48V, power 200W. IP20

5744

Power supply 48V, power 250W. IP20

5942/T

4-zone RF touch panel wall-mounted for use with universal controllers 5940/U and 5960/U.

5993

Power supply 48V, power 100W. IP67

5995

Power supply 48V, power 150W. IP67

5996

Power supply 48V, power 240W. IP67

5997

Power supply 48V, power 320W. IP67

ACCESSORIES



TR48005 TR48105

Power feed end cap (SELV) for 48V track, black finish.

TR48005 = left;
TR48105 = right.

Compatible with
all 48V tracks.



TR48205

End cap, black finish for 48V track.

Compatible with:
TR47105, TR47205,
TR47305.



TR48205

End cap for trimless 48V track.

Compatible with:
TR47405, TR47505,
TR47605.



TR48405

End cap for high-profile 48V track.

Compatible with:
TR47705, TR47805,
TR47905.



TR48505

Flexible black SELV electrical connector for 48V track.

Compatible with
all 48V tracks.



TR48405

Inline SELV electrical and mechanical connector for 48V track.

Compatible with:
TR47105, TR47205,
TR47305, TR47705,
TR47805, TR47905.



TR48705

Inline SELV electrical and mechanical connector for 48V trimless track.

Compatible with:
TR47405, TR47505,
TR47605.



TR48805

L-shaped SELV electrical connector for 48V track.

Compatible with
all 48V tracks.



TR48905 TR49005

Aluminium L-profile for 48V track, black finish.

TR48905 = left;
TR49005 = right.

Compatible with:
TR47105, TR47205,
TR47305.



TR49105 TR49205

Aluminium L-profile for 48V trimless track, black finish.

TR49105 = left;
TR49205 = right.

Compatible with:
TR47405, TR47505,
TR47605.



TR49105 TR49205

Aluminium L-profile for high-profile 48V track, black finish.

TR49305 = left;
TR49405 = right.

Compatible with:
TR47705, TR47805,
TR47905.



TR49505

Vertical L-connector in aluminium for 48V track, black finish.

Compatible with:
TR47105, TR47205,
TR47305.



TR49605

Vertical L-connector in aluminium for 48V trimless track, black finish.

Compatible with:
TR47405, TR47505,
TR47605.



TR49605

Vertical L-connector in aluminium for high-profile 48V track, black finish.

Compatible with:
TR47705, TR47805,
TR47905.



TR49805

3m suspension kit.

Compatible with:
TR47105, TR47205,
TR47305, TR47705,
TR47805, TR47905.



TR49905

Black painted aluminium clip for ceiling installation.

Compatible with:
TR47105, TR47205,
TR47305, TR47705,
TR47805, TR47905.



TR50005 TR50105 TR50205

Additional black protective sheath.

TR50005 1m
TR50105 2m
TR50205 3m

TR50305

3m reinforcement and suspension kit.

Compatible with:
TR47705, TR47805,
TR47905, TR47105,
TR47205, TR47305.



Brooklands House, Sywell Aerodrome
Sywell Northampton, NN6 0BT
+44 (0) 1604 495 151
sales@collingwoodgroup.com
collingwoodlighting.com

Published March 2025

 By INOVARA